

MDS-6G (SMART)

Closed Microwave Digestion/Extraction System



*20 years innovative design in industry without any personal injury cases
Free lifetime warranty for magnetron-the core part of microwave digester
Won BCEIA Gold Award three times and have over 8000 users globally*

MDS-6G (SMART)

Closed Microwave Digestion/Extraction System

Set a new benchmark for practical compact microwave digester

All-steel industrial grade chamber with corrosion resistance and ultra-long life

Exclusive patented multifunctional safety bolt design, instead of safety membrane and other consumables

Ultrastrength aerospace composite fiber digestion outer vessel

Precise pressure control by piezoelectric crystal without cross-contamination problems


MDS-6G microwave digestion/extraction/synthesis system (nickname: SMART), a subversion of tradition, is a market-oriented practical compact microwave digester made by Sineo with its over 20 years' experience; It highlights the company's three major ideas of product design and also meets users' needs in "safety", "durability" and "convenience of operation."

- The outer vessel of SMART exclusively made by ultrastrength aerospace composite fiber is invincible in anti-explosion, and its performance indicators such as corrosion resistance, high temperature/impact/pressure resistance are far better than that of the widely used modified PEEK engineering plastics vessel (this material is fusible at high temperature, fragile at high pressure and explosive by chemical corrosion). The compressive strength of aerospace composite fiber is up to 10000psi and temperature 500-600°C, fundamentally eliminating safety risks to operator in use.



- Quantified vertical blast/safety bolt design, ensures samples be closed completely and triggers a quantified pressure relief while over pressure; safety bolt (patent) unit, instead of safety membrane and other consumables, ensure the digestion vessel be sealed completely under normal working conditions. And only when the pressure is large enough and may constitute a danger to the safety, the safety bolt will automatically blow out vertically and the cover auto-up to release the pressure, achieving quantified vertical blast pressure-relief to guarantee its well operation. Under normal operation, the safety bolt won't blow out and requires no replacement. In addition, it is easy for venting to open the cover after completion of digestion.

- The industrial-leading pressure measuring technology by piezoelectric crystal and high-precision Pt sensor temperature measurement and control, through closed-loop control of microwave power by inverter technology, ensures the accuracy of pressure and temperature monitoring and control. The application of patented piezoelectric crystal brings about complete isolation of samples from pressure measurement system in digestion process, thoroughly solving the problems of cross contamination of samples due to commonly used air pipe in market and of the limitation in digestion samples because of low-pressure proof of air pipe.

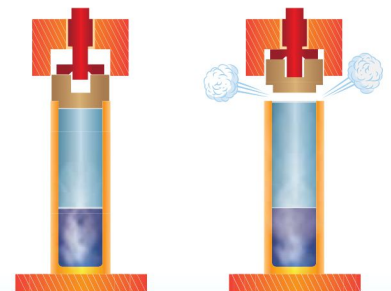

- The Gold Award in Automatic Frequency Control of Non-pulse Microwave Power on BCEIA represents that the company not only achieves the accurate closed-loop control of the temperature and pressure, but also improves the efficiency of microwave transmitter of magnetron, realizing energy saving (37.5 %).

Pop
expl
cha
self
and
imm
door

*20 years innovative design in industry without any personal injury cases
Free lifetime warranty for magnetron-the core part of microwave digester
Won BCEIA Gold Award three times and have over 8000 users globally*

- The patented design that the whole set of digestion vessels in chamber always continuously rotates in one direction, breaks conventions of <math><360^\circ</math> back and forth rotation of the digestion unit, avoiding uneven heating on vessels by microwave and reducing impact on turntable motor, extending service life.
- Sturdy and durable industrial-grade chamber design strengthens its impact resistance; Professional focused microwave design makes microwave heating more efficient; Multi-layer chemical resistant coating greatly improves the service life and safety of the system; the popup cushioning explosion-proof sliding chamber door builds a passive safety protection system, easing operation; double-locked self-checking system of the chamber door and the push-type open-door mechanism at the top make the operation simple and easy; efficient exhaust system design achieves fast and safe air-cooled cooling, improving operational efficiency.



Long life and high brightness display screen

Concise operation panel

Push-type open-door button at the top, easy and reliable in operation

Industrial-grade chamber, solid in structure, uniform in focused microwave and superior in ventilation.

8-workstation frame digestion vessel, ultra-strength composite fiber outer vessel, patented overpressure relief design, eliminating explosion-proof membrane and other consumables.

Popup cushioning explosion-proof sliding chamber door, locked self-checking system, the function of stop immediately when the door is opened.



MPS-6G

Main Technical Parameters of MDS-6G Closed Microwave Digestion/Extraction System

Power:	220-240 VAC 50/60Hz 8A
Microwave frequency:	2450MHz
Installed power:	1800W
Maximum output power:	1000W, non-pulse continuous automatic variable frequency control
Turntable design:	Load 8 MP-100 closed digestion vessels at same time
Pressure measurement and control system:	Piezoelectric crystal pressure sensor, pressure control range :0-10MPa (1500 psi), accuracy ± 0.01 MPa
Temperature measurement and control system:	High-precision platinum resistor temperature sensor, temperature range :0-300°C, accuracy ± 1 °C
Outer vessel material:	Explosion-proof outer vessel made of aerospace composite fiber
Inner vessel material:	TFM material
Chamber exhaust system:	High-power anticorrosion axial fan, exhaust speed: 3.1 m ³ /min
Operating ambient temperature:	0-40 °C
Working environment humidity:	15-80%RH
Whole physical size:	450 × 515 × 510 mm (W × D × H)
Net weight:	40 KG

MDS-6G (SMART) Closed Microwave Digestion/Extraction System



Standard 6-station or optional 8-station ultrastrength frame closed reaction vessel

8-station rotor MP-100 closed high-pressure reaction vessel:

Maximum Pressure:	15MPa(2250psi)
Maximum sustained temperature:	300 °C
Maximum working temperature:	250 °C
Inner vessel volume:	100ml
Outer vessel material:	Ultrastrength aerospace composite fiber
Inner vessel material:	TFM (Modified PTFE)
Maximum batch capacity:	8 vessels



Application area

Food and drug (milk and dairy products, health food), cosmetics, agricultural and sideline products, aquatic products, biological tissues, various types of feed, energy and petrochemical, geology and mineral resources, environmental resources (air, water, soil), metals, alloys, ceramics, RoHS, medicine, domestic wastes.

