

CONICAL TUBE MIXER™ INCUBATOR-CONICAL TUBE MIXER™



■ confido-S50 new4 / Ingenious mixing for conical tube

- Special motion and Ingenious mixing


■ confido-S50H new4 / Ideal mixing & heating for conical tube

- Digital micro processor control [PID] for highest accuracy
- Effective ventilation system guarantees accurate temperature control
- "UP and OVER" door
- safety features:
 - Flashing alarm lamp to warn over-temperature
 - Over-temperature cut-out with safety thermostat


► Common facts

- A sturdy double rack for stable shaking
- High quality DC brushless motor for gentle and powerful motion
- Continuous or digital timed operation
- Needless other accessory
- LED display shows actual speed and time

- Ingenious mixing for conical tube

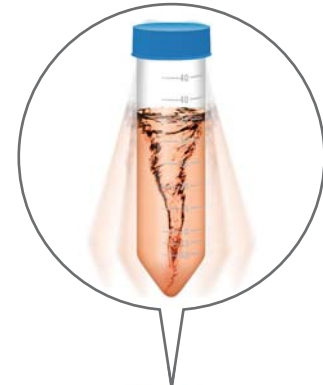

► confido-S50 **new4**



► confido-S50H **new4**

Specification		confido-S50 new4	confido-S50H new4
Model		confido-S50 new4	confido-S50H new4
Orbit Range		15ml-13mm / 50ml-10mm	
Speed Range		60 ~600rpm	
Capacity	conical tube 50ml	12ea	
	conical tube 15ml	16ea	
Temp. Range		-	Ambient +5°C~65°C
Temp. Accuracy		-	±0.2°C
Motor		BLDC Motor	
Timer (temp.)		-	99hour59min
Timer (speed)		99hour59min	-
Dimensions (mm)		W210xD365xH227	W280xD423xH257
Weight		9kg	15kg
Wattage		35W	330W
Power		Free Voltage (AC100-240V)	AC 100-240V (*220-230V : CE cert)
Frequency		50/60Hz	50/60Hz