


Multi-Flask Shaker VKS 75 A control

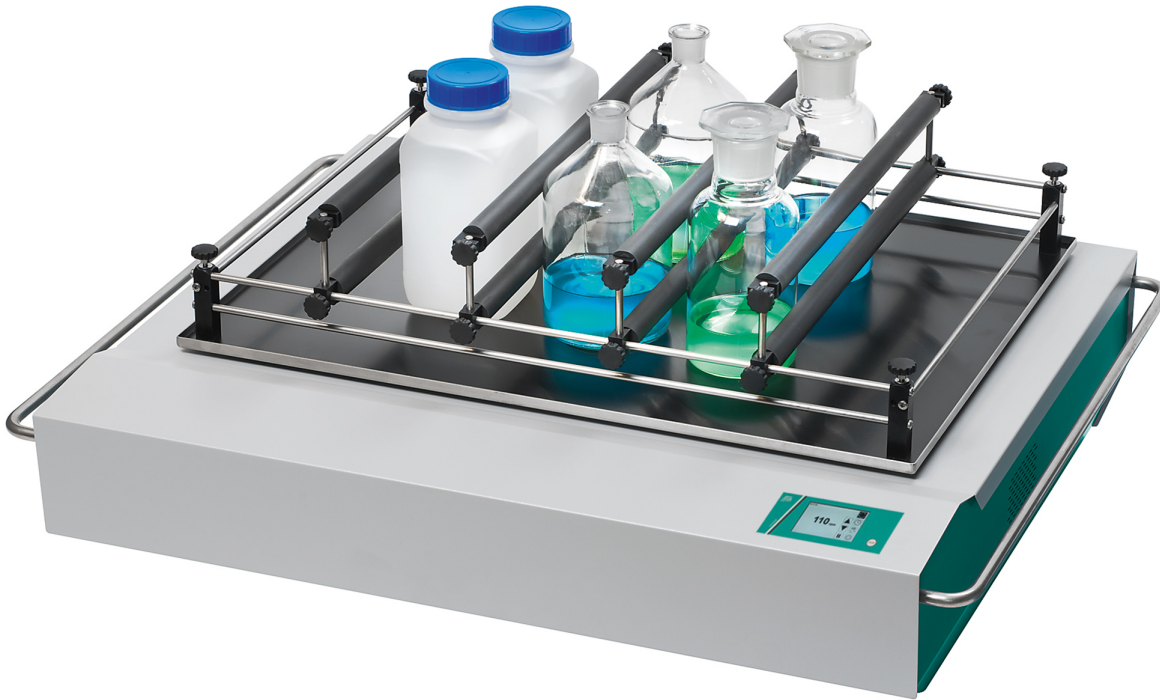

Description

Big heavy-duty shaker VKS 75 A control with touch display and programmable control has an orbital shaking motion, a speed range of 30 - 200 rpm and a stroke of 26 mm. The VKS 75 A control is ideally suited for high loads up to 75 kg. **(floor installation only!)**

Basic Equipment

Basic device **without shaking plate, without rack system**

With touch display and programmable control

Loading Capacity

Erlenmeyer flasks 500 ml 32 pieces

Erlenmeyer flasks 2000 ml 12 pieces

Separating funnels 1000 ml 6 pieces

You will find further loading possibilities [here](#)

[Loading details](#) against shaking speed.

Options

[USB 2.0 interface](#)

[RS 232 interface](#)

[Control interface](#)

[Safety Package](#)

[Defined stop](#)

Details

| | |
|--------------------------|---|
| Motion: | orbital |
| Shaking platform: | 760 x 600 mm |
| Max. load: | 75 kg |
| Shaking Speed: | 30 - 200 rpm, in steps of 5 |
| Stroke: | 26 mm |
| Runtime: | programmable / continuous |
| Order no.: | 6111 000 |
| Accessory: | Shaking plate VKS (1-storey) Rack System Combifix VKS A Rack System Combifix VKS B Rack System Combifix VKS C Universal tray VKS 1-storey Rack System VKS (2-storey) Rack System VKS "Giant" (3-storey) |

Technical specifications

| | |
|--------------------------------|--|
| Electrical supply: | 100 - 240 V, 50 / 60 Hz please indicate in case of order |
| Enclosure protection: | IP 21 |
| Heat emission: | max. 15 W |
| Ambient temperature: | 5°C to 50°C |
| Relative humidity: | ~ 85 % |
| Dimensions (w x d x h): | 1050 x 835 x 250 mm |
| Weight: | 110 kg |