


Miniature Shaker KM 2

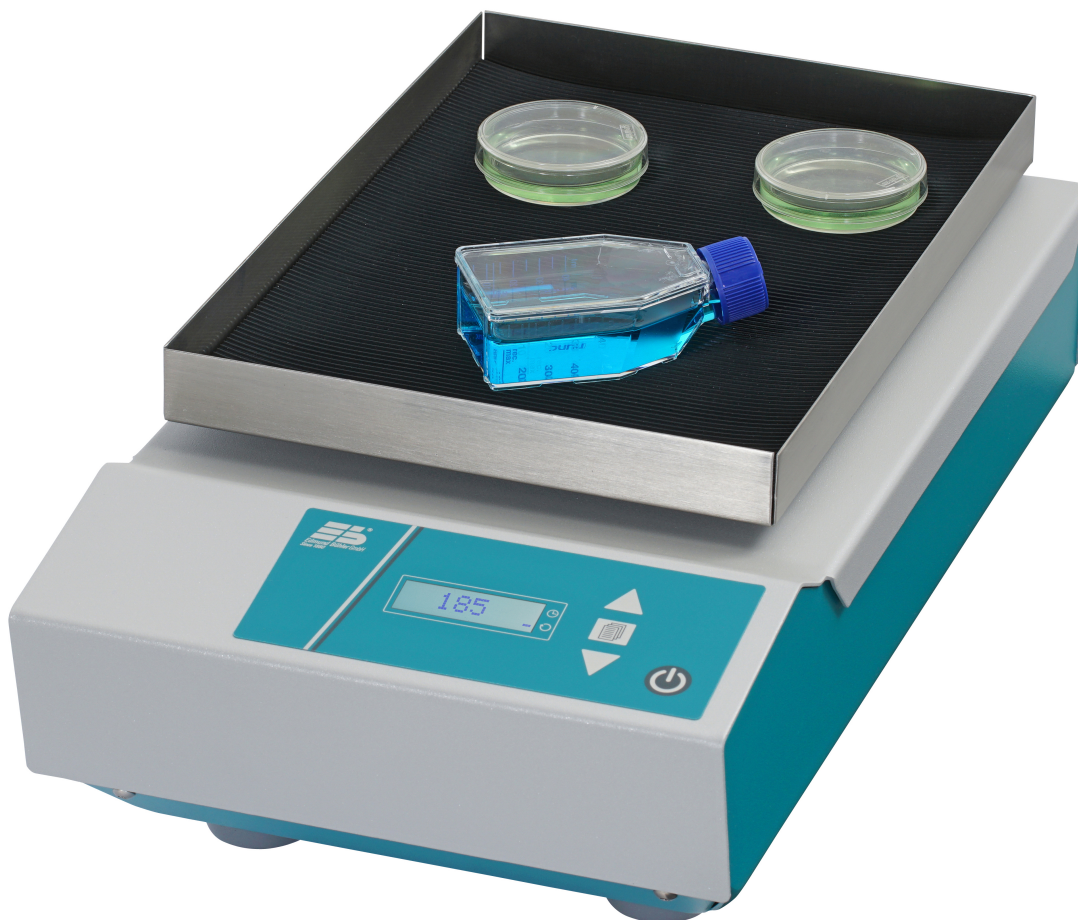

Description

The orbital shaker KM 2 has a shaking platform of 200 x 295 mm which can be loaded with 2 kg. The stroke is 20 mm and the shaking speed between 5 and 220 rpm.

Basic Equipment

Basic device incl. basic platform and rubber mat

Loading Capacity

Erlenmeyer flasks 100 ml 9 pieces

Erlenmeyer flasks 500 ml 2 pieces

You will find further loading possibilities [here](#)

Details

Motion: orbital
Shaking platform: 200 x 295 mm
Max. load: 2 kg
Shaking speed: 5 - 220 rpm, in steps of 5
Stroke: 20 mm
LED display: 0 - 99 h 59 min / continuous
Order No.: 6113 000
Accessory: Universal tray KM Mini
Universal tray KM
Clamping strip KM

Technical specifications

Electrical supply: 100 - 240 V, 50 / 60 Hz
Enclosure protection: IP 21
Heat emission: approx. 0,5 - 2 W
Ambient temperature: 4°C to 45°C
Relative humidity: ~ 95 % (non-condensing)
Dimensions (w x d x h): 250 x 415 x 145 mm
Weight: 8,1 kg