


Horizontal
Laminar Flow
Cabinet



LCD Display

Microprocessor control system,
LCD display

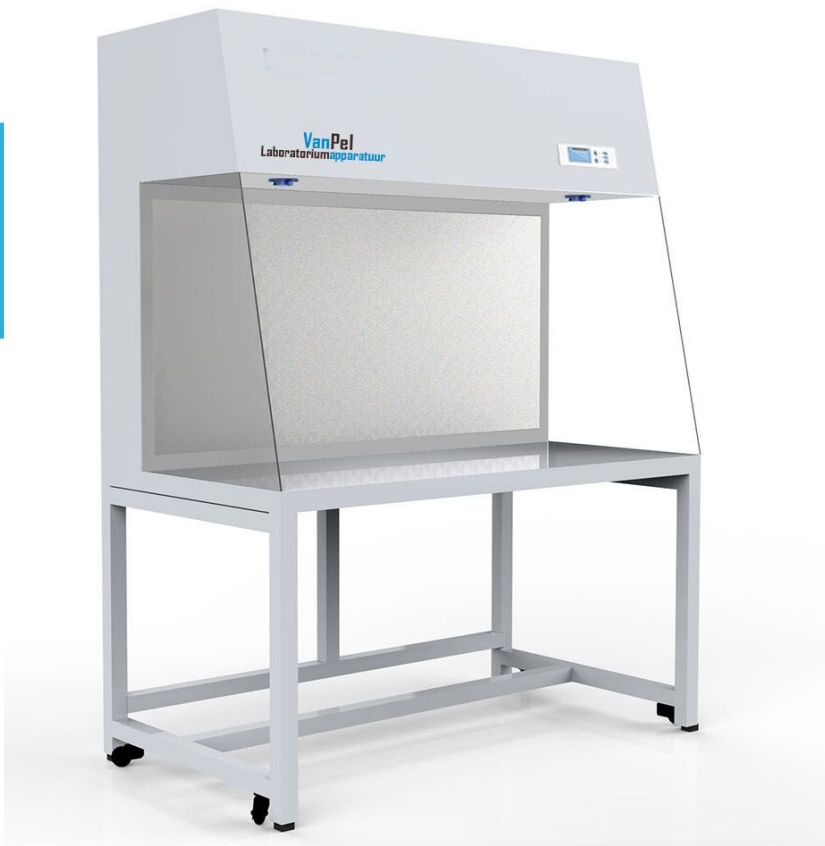

Waterproof Socket

2 waterproof sockets are located
in the top panel, for optimum
convenience of using small
devices inside the cabinet.



Side Glass Window

The transparent side glass windows
maximize light and visibility inside
the cabinet, providing a bright and
open working environment.

TECHNICAL PARAMETERS

Model	FLOWH1000	FLOWH1500	FLOWH1800
External Size (W*D*H)	1100*808*1690mm	1500*808*1690mm	1800*808*1890mm
Internal Size (W*D*H)	1000*500*600mm	1400*500*600mm	1700*500*800mm
Work Surface Height	750mm		
Display	LCD Display		
Airflow Velocity	Average of 0.30~0.45m/s		
Material	Main Body: Cold-rolled steel with anti-bacteria powder coating Work Table: 304 stainless steel Side Windows: 8mm toughened glass, anti-UV		
Pre-Filter	Polyester fiber, washable		
HEPA Filter	99.999% efficiency at 0.3µm		
Noise	≤65dB(A)		
LED Lamp	12W*1	16W*1	16W*2
UV Lamp	20W*1	30W*1	20W*2
	Emission of 253.7 nanometers		
Consumption	200W	300W	400W
Waterproof Socket	Two, total load≤500W		
Caster	Universal caster with leveling feet		
Power Supply	AC220V±10%, 50/60Hz; 110V±10%, 60Hz		
Standard Accessory	LED lamp, UV lamp*2, Base stand, Waterproof socket*2, Hook*10		
Optional Accessory	Electric height adjustable base stand		
Gross Weight	170kg	185kg	240kg
Package Size(W*D*H)	1250*1030*1340mm	1650*1030*1340mm	1950*1050*1550mm